

How to easily remove and install C-clips and bend the hinge

1. Remove a c-clip



Set the hinge on a table vertically, then use a narrow screw driver to pull out the c-clip downward. A rubber mat or card board is recommended to put on top of the table to avoid damage

2. Install a c-clip



Set the unfinished assembly vertically on a table




Use a flat wrench to push down the clip till clicking



Use the curvy part of the wrench to check the clip is sitting right in the groove by pushing down

3. Bend the hinge

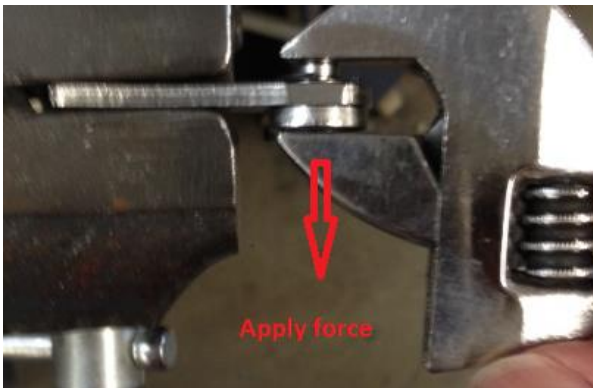

Use a vise (a rag is recommended to protect hinge surfaces) to secure one leaf of the hinge, and then apply force with a crescent wrench to bend to shape